



DLITE

Control Solutions for Creative Professionals



DLITE




Dlite offers intuitive, hands-on tools for quick programming and playback, as well as all the advanced features required for complex lighting applications.

Dlite supports both manual and programmed operation. Up to 96 faders provide direct manual access to channels, 2 scene preset operation, and context sensitive programming of fixture parameters, libraries, groups, cues, scenes, and chases. 20 playback controllers and one split cross-fader offer manual and fully automated playback operations.

Dlite is perfect for medium size venues with limited budgets, but complex requirements and diverse needs. Theaters, television studios, rental houses and schools will find Dlite the most affordable, high-performance and intuitive console available.

Dlite includes a broad range of compatible models, offering convenient and cost effective solutions for any venue and budget.

DLITE 96

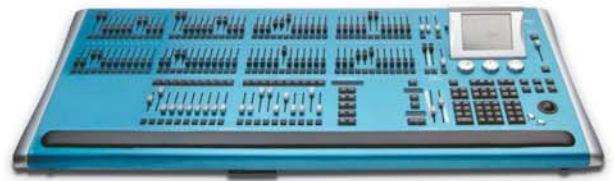

DLITE 72



DLITE 48



DLITE COMPACT





DLITE PC



HIGHLIGHTS



- Adjustable graphic (320x240) LCD touch-screen
- XGA monitor display
- 4 control universes, 2048 attributes
- Internal flash disk for storage of shows and fixture profiles
- Internal battery for safe emergency shutdown
- Ethernet for DMX distribution and remote control
- I/F/C/B timing
- Effects ('Shapes') generation package
- Automatic color palettes
- 16 bit fixture parameters
- Wireless PDA remote control
- PC-Based fixture profile editor

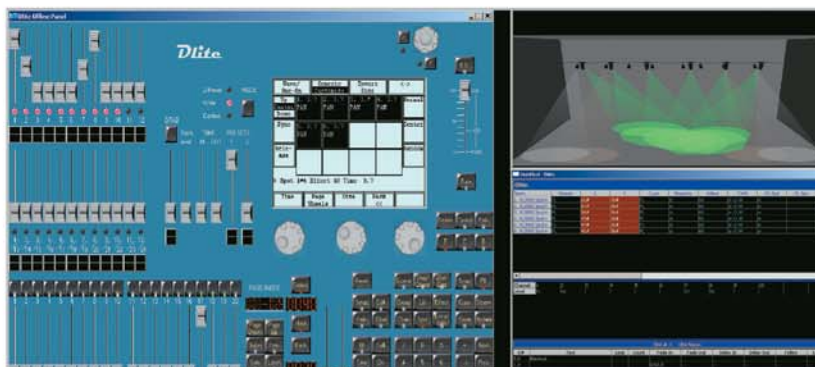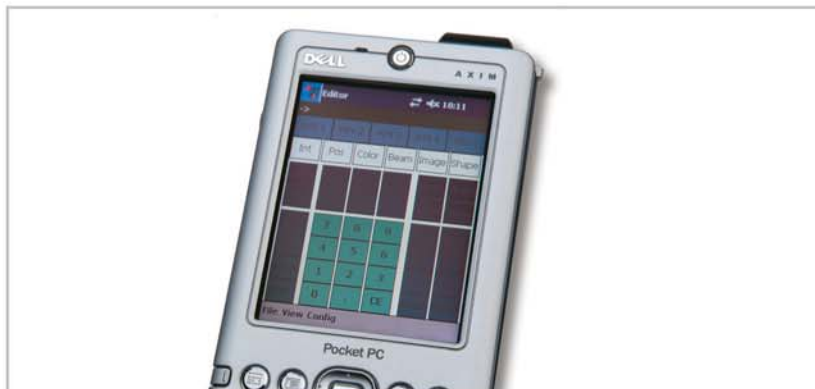

CAPACITY

4 control universes/2048 attributes (2 via DMX ports, 2 via Ethernet)
 2048 control channels
 252 moving lights (up to 48 parameters per fixture)
 72 Q-lists ('Stacks') up to 999.9 cues
 240 Scenes
 72 Chases of up to 48 steps
 72 Snaps (playback snapshots or 'pages')
 96 Groups (fixture selection macros)
 72 Effects
 360 Show files on internal flash disk
 360 Device files (fixture profiles) on internal flash disk

INPUT/OUTPUT

2 DMX512 output ports
 1 DMX512 input port
 1 Ethernet port (for additional DMX distribution and remote control)
 SMPTE input
 MIDI In/Thru
 Audio (Sound-to-Light) input

DISPLAY

1 graphic 320x240 LCD touch screen
 1 external XGA monitor display

STORAGE

Internal 128 MB Flash Disk
 3 USB 2.0 ports

DIMENSIONS

| | Length | Width | Height | Weight |
|----------------|---------------|--------------|------------|----------------|
| COMPACT | 67cm (26") | 47cm (18.5") | 9cm (3.5") | 9kg/17.6(lbs) |
| 48 | 97cm (38") | 57cm (22.5") | 9cm (3.5") | 12kg/24.6(lbs) |
| 72 | 105cm (41") | 57cm (22.5") | 9cm (3.5") | 14kg/30.9(lbs) |
| 96 | 123cm (48.5") | 57cm (22.59) | 9cm (3.5") | 16kg/35.3(lbs) |

Compulite Systems (2000) Ltd.
 9 Hanagar Street, Neve Ne'eman B
 Industrial Zone
 Hod Hasharon, 45421, Israel
 Tel: 972 9 744 6555
 Fax: 972 9 746 6515
 info@compulite.com
 www.compulite.com

